

Back-Lit

Panel light 48 w

The backlit 48 W LED panel has low energy consumption thanks to its good luminous efficiency.

It also has an excellent power factor and it does not cause flicker.

This type of panel can be used in suspension, recessed and surface mounting applications with the appropriate accessories.



Product data


General information	
LED type	SMD
Nominal lifetime	30 000 h
Number of switch cycles	X 15000
Dimmable	No
Light characteristic	
Beam angle	120 °
Nominal luminous flux	4800 lm
Efficacy	100 lm/W
Temperature of correlated color	4000 / 6500 K (According to choice)
Color rendering index	80
Electrical features	
Input voltage	220 – 240 V
Input frequency	50 Hz
Absorbed power	48 W
Power factor	≥ 0.9
Temperature	
Operating temperature	-20 to +40 °C
Standards	
Energy Efficiency Class	A+
Package data	
Package dimentions	620 x 30 x 650 mm
Packaging by box	10




LIGHT IS LED

Back-lit panel light 48w

Dimensional drawing

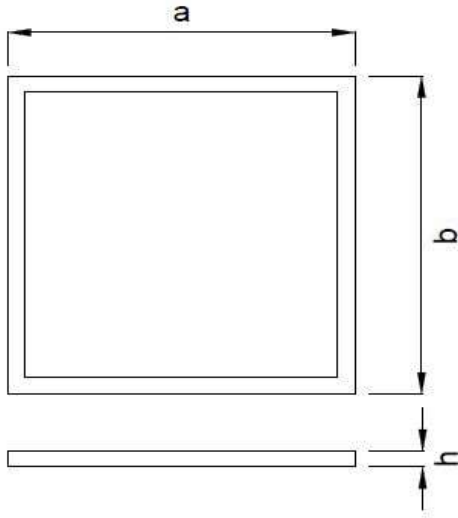


Energy efficiency label




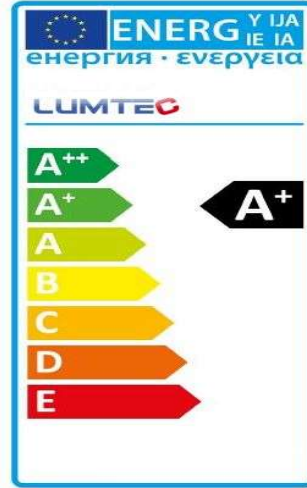


Product	a/b	h
Back-lit panel light 48 W	595 mm	30 mm

Photometric

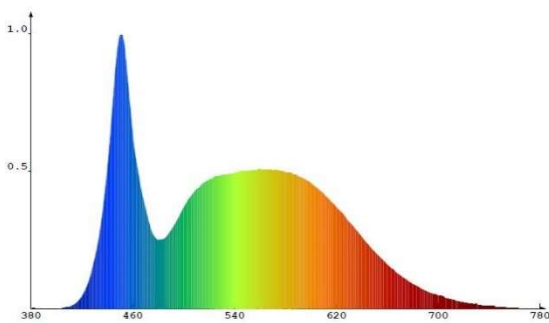

Life time

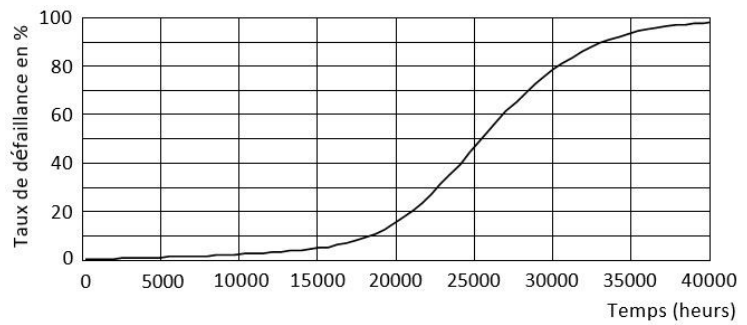

Id : 9105023295



LIGHT IS LED



www.lumtec.tn



Contact@lumtec.tn

Contact@kacem-electronic.com