

APOLO+

APOLO is a high-quality LED flood light. It is formed by a high-purity, high-pressure injected cast aluminum body and a stainless steel arm fastening system.

This spotlight also features a unique radiator design that extends its life.

APOLO also features robust glass that can withstand mechanical shocks that can degrade or impair the projector's performance.

This floodlight can be used in a variety of environments, including facades, gardens, bridges, and public spaces.





Product Data

General characteristics	
Power	100 – 400 W
Type LED	SMD
Luminous efficiency	160 Lm/w
Luminous flux	16,000 Lm-64,000 Lm
Materials	Aluminium
Fastener	With Arm (Steel)
Optical cover	Tempered flat glass
Correlated Color Temperature	2700 -6000 k
Color rendering index	70
Standards and recommendations	
Ingress code	IP66 [Dust Ingress Protection, Water Jet Protection]
Mechanical Shock Protection Code	IK09
Safety class	Class I or II (depending on Request)
Electrical characteristics	
Input voltage	100 – 265 V
Input Frequency	50 / 60 Hz
Power factor	≥ 0.9
Surge protection	10 kV (Optional)

APOLO+

Lifespan	
Lifespan	100,000 h
Terms of Use	
Operating Temperature	-10 to 60 °C
Room temperature	25 °C
Logistics data	
Net Weight	6 Kg
Total weight	6.7 kg

Dimensions

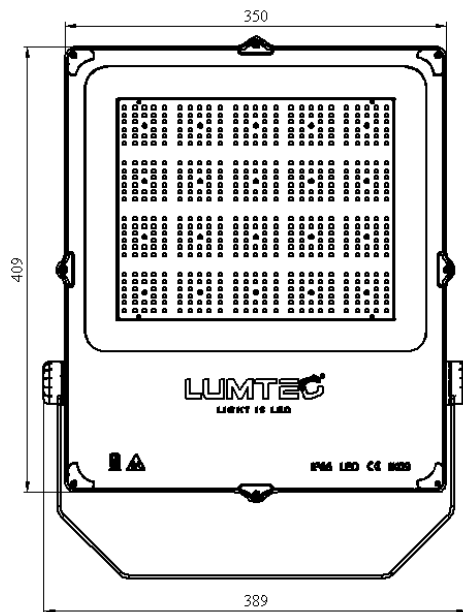

Applications



Parking



Urban streets and residential



Railway stations and metro stations






Cycle paths and walking routes



Places and pedestrian areas



Id: 9105023295



LIGHT IS LED

www.lumtec.tn

Contact@lumtec.tn