

ASTRO

The Astro LED floodlight with DMX function combines performance and versatility. Featuring powerful LEDs, it ensures bright brightness while being energy efficient. Its DMX compatibility allows for precise control of colors, intensity, and effects, providing maximum flexibility for professional events. Easy to integrate into a DMX network, it ensures perfect synchronization with other equipment. Its compact and robust design makes it ideal for all types of installations. Astro: the professional, powerful and adaptable lighting.




Product Data


General characteristics	
Power	50 W
Type LED	SMD
Luminous efficiency	100 Lm/W
Luminous flux	5000 Lm
Materials	Aluminum
Optical Cover	Tempered Flat Glass
Correlated Color Temperature	RGB + Blanc (3000 – 6500 K)
Color rendering index	70
Dimmable	Yes with IR remote control
Standards and recommendations	
Ingress code	IP66 [Dust Ingress Protection, Water Jet Protection]
Mechanical Shock Protection Code	IK08
Electrical characteristics	
Input voltage	100 – 240 V
Input Frequency	50 /60 Hz
Power factor	≥ 0.9
Lifespan	
Lifespan	50,000 h
Terms of Use	
Operating Temperature	-20 to +40 °C
Room temperature	25 °C

Dimensional Diagram



DIMENSIONS	K	L	H
	211	180	45

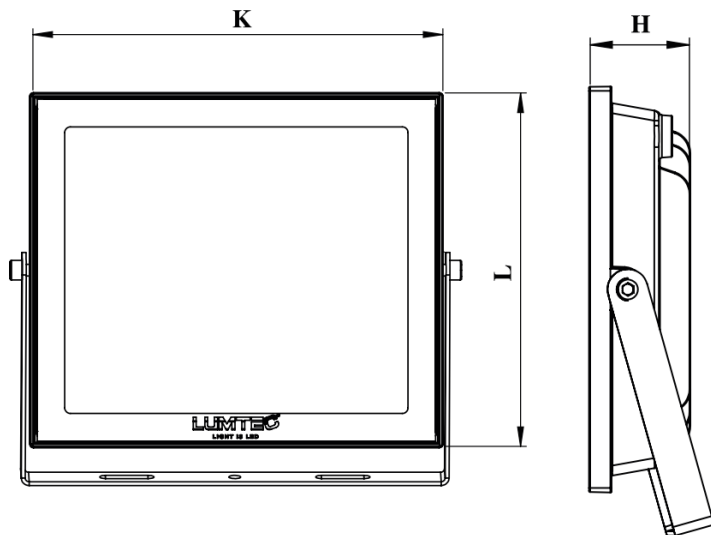

Applications

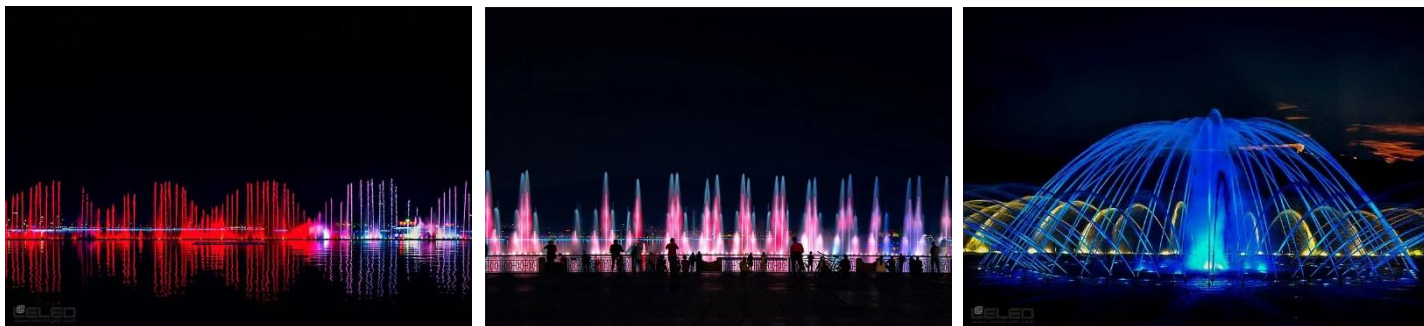

Id : 9105023295



LIGHT IS LED

www.lumtec.tn

Contact@lumtec.tn