

CELIA

CELIA improves urban environments by creating spaces where people feel good and safe, making your city a more attractive place to live and visit. With a timeless and elegant design, CELIA leverages the latest LED technology to achieve significant energy savings...




CELIA A

CELIA B


Product Data

General characteristics	
Corp	Aluminium
Correlated Color Temperature	3000 – 6500 K
LED Driver inclus	Yes
Type LED	SMD
IEC protection class	Safety Class I or II (Depending on Choice)
Standards and recommendations	
Ingress code	IP66 [protected against dust ingress, protection against water jets]
Mechanical Shock Protection Code	IK08
Luminous efficiency	≥ 140 Lm/W
Color rendering index	70
Electrical characteristics	
Input voltage	220 – 240 V
Input Frequency	50 / 60 Hz
Minimum power factor	0.9
Power Consumption	30 – 150 W
Surge protection	10 kV (optional)
Lifespan	
Lifespan	≥ 100,000 hours
Operating Conditions	
Operating Temperature	-10 to 50 °C
Weight	A: 7.8 kg B: 11.7 kg

Dimension (mm)

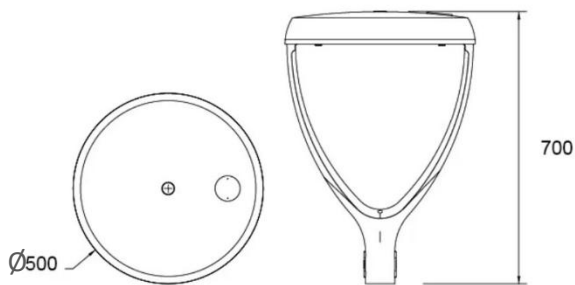


Celia B

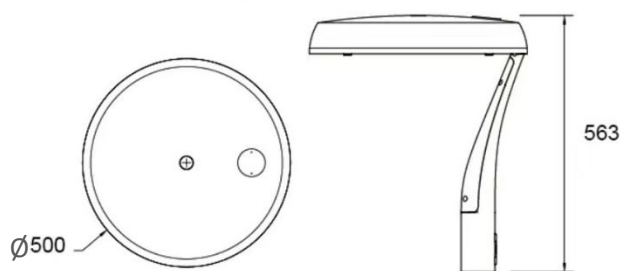

Celia A

Photometric curve

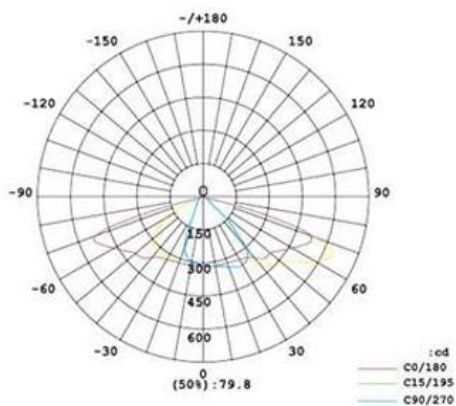

Applications



Parking

Urban streets and residential




Railway stations and metro stations

Cycle paths and walking routes

Places and pedestrian areas



Id: 9105023295



LIGHT IS LED

www.lumtec.tn

Contact@lumtec.tn