


3D Led Panel

recessed Round 36 W

In order to ensure unified light distribution, resulting in comfortable indoor lighting conditions, our LED panels are assisted by special optical lenses. This innovative range of recessed ceiling lights is also an economical and eco-friendly solution.

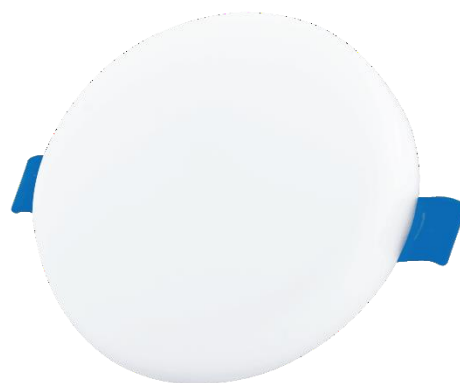


Product data

General information	
Led type	SMD
Nominal lifetime	25 000 h
Number of switch cycles	X 12500
Diming	No
Photométries et calorimétries	
Input voltage	120 °
Input frequency	3600 lm
Absorbed power	100 lm/W
Power factor	8000 K
Input voltage	80
Electrical features	
Tension d'entrée	220 – 240 V
Fréquence d'entrée	50 Hz
Puissance absorbée	36 W
Facteur de puissance	≥ 0.5
Temperature	
Operating temperature	-20 to +40 °C
Standards and recommendations	
Energy class	A+
Logistics data	
Packaging dimensions	95 x 38 x 103 mm
Pieces per carton	60


3D Led Panel recessed Round 36 W

Dimensional drawing




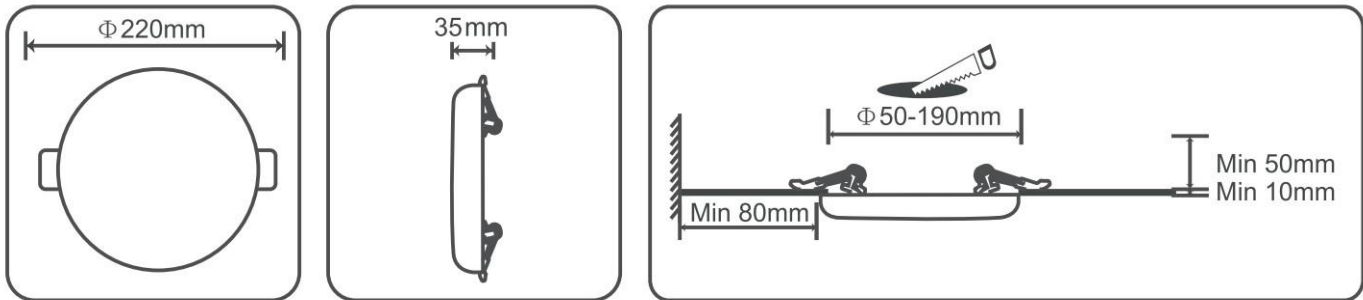


Photometric

Spectrum

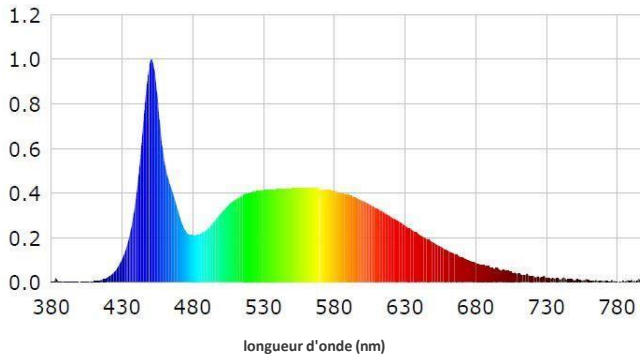

Lifetime

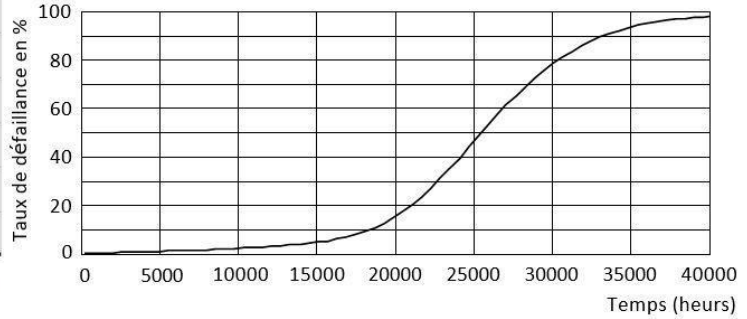

Id : 9105023295



LIGHT IS LED

www.lumtec.tn

Contact@lumtec.tn