

3D Led Panel recessed Square 10 W

In order to ensure unified light distribution, resulting in comfortable indoor lighting conditions, our LED panels are assisted by special optical lenses. This innovative range of recessed ceiling lights is also an economical and eco-friendly solution.




Product data

General information	
Led type	SMD
Nominal lifetime	25 000 h
Number of switch cycles	X 12500
Diming	No
Photometries and calorimetries	
Beam emission angle	120 °
Luminous flow	1050 lm
Luminous efficiency	105 lm/W
Correlated color temperature	8000 K
Color rendering index	80
Electrical features	
Input voltage	220 – 240 V
Input frequency	50 Hz
Absorbed power	10 W
Power factor	≥ 0.5
Temperature	
Operating temperature	-20 to +40 °C
Standards and recommendations	
Energy class	A+
Logistics data	
Packaging dimensions	95 x 38 x 103 mm
Pieces per carton	60


3D Led Panel recessed Square 10 W

Dimensional drawing





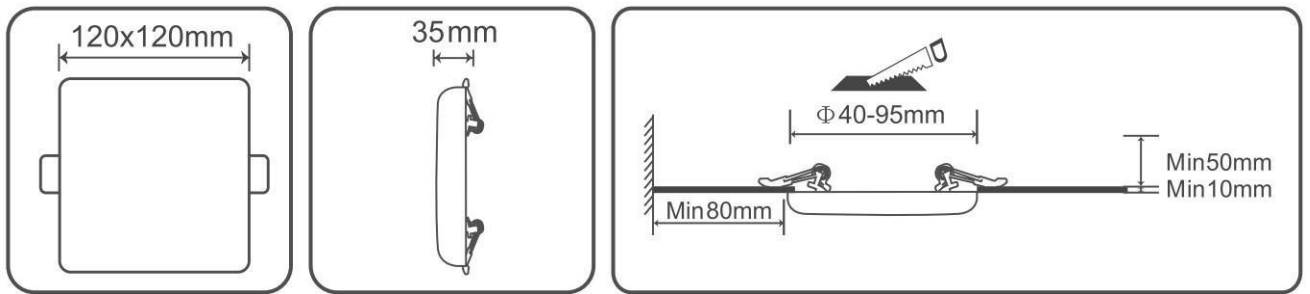


Photometric

Spectrum

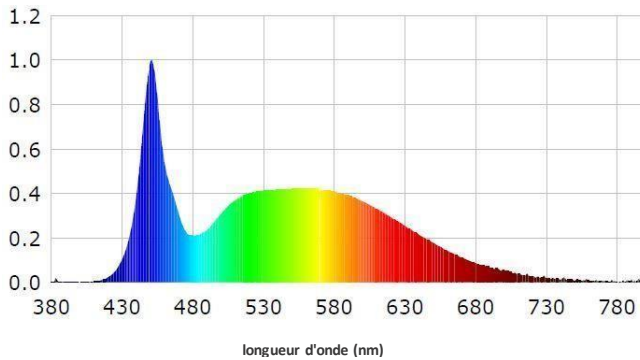

Lifetime

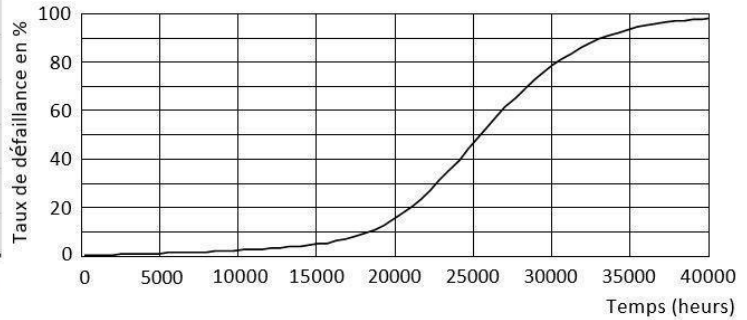

Id : 9105023295



LUMTEC®

LIGHT IS LED



www.lumtec.tn



Contact@lumtec.tn