

Led Tube T8

The T8 LED tube light provides a unified light effect for any general lighting as a high-performance LED solution. It also stands out for its immediate energy efficiency. In addition, this LED tube has the best quality/service life ratio, as well as low energy and maintenance costs.




Product Data

| General characteristics | |
|--|---|
| Nerve | G13 |
| Lifespan | 35,000 hours |
| Dimmable | No |
| Photometry and calorimetry | |
| Beam Emission Angle | 320 ° |
| Luminous flux | 1320 lm / 2640 lm / 3300 / 4400 lm / 5500 lm |
| Correlated Color Temperature | 4000 – 10,000 K (Possible with 12,000 K) |
| Color rendering index | 80 |
| Electrical characteristics | |
| Input voltage | 220 – 240 V |
| Input Frequency | 50 / 60 Hz |
| Power Consumption | 12 W / 24 W / 30 W / 40 W / 50 W (Selon le choix) |
| Nominal Start Time | 0.5 s |
| Nominal heating time at 60% of the luminous flux | 0.5 s |
| Temperature | |
| Operating Temperature | -20 to +50 °C |
| Storage Temperature | -40 to +65 °C |
| Logistics data | |
| Packaging Unit | 1 |
| Pieces per carton | 25 |


Led Tube T8

Dimensional Diagram


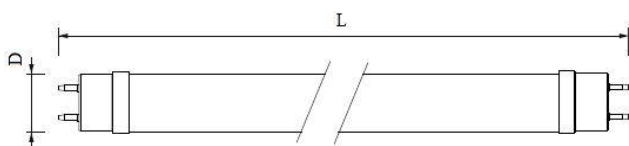


| Product | L | D |
|------------------|---------|-------|
| Led tube T8 12 W | 600 mm | 26 mm |
| Led tube T8 24 W | 1200 mm | 26 mm |
| Led tube T8 30 W | 1200 mm | 26 mm |
| Led tube T8 40 W | 1200 mm | 26 mm |
| Led tube T8 50 W | 1200 mm | 26 mm |

Lifespan

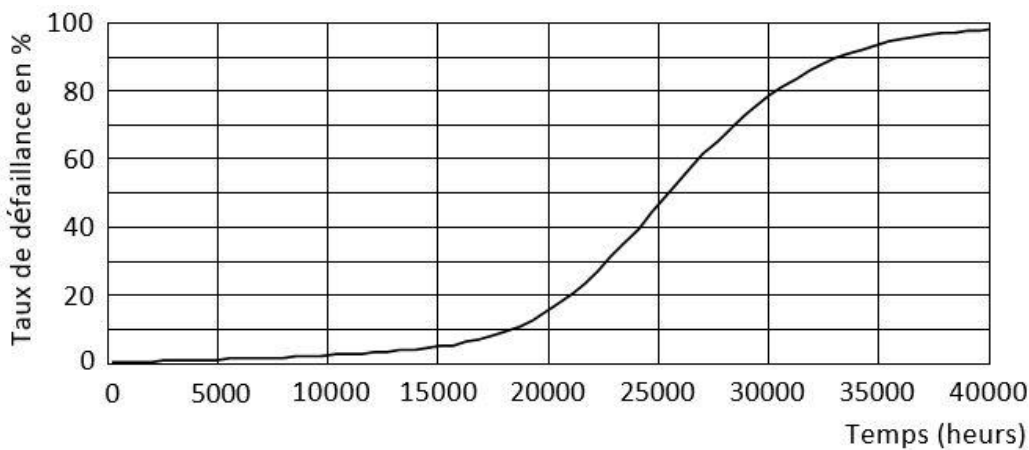

Id : 9105023295



LIGHT IS LED

www.lumtec.tn

Contact@lumtec.tn