

Surface mounted round Led panel 9 W

The surface mounted Led panel is formed with optical lenses on each Led ensuring a unified distribution of light. This type of panel is also easy to install, which is why it is found in various applications such as at a house, office, restaurant, hotel, supermarket, and so on.




Product Data


General information	
LED type	SMD
Nominal lifetime	25 000 h
Number of switch cycles	X 12500
Dimmable	No
Light characteristic	
Beam Angle	120 °
Nominal luminous flux	≥ 720 lm
Efficacy	80 lm/W
Temperature of correlated color	4000 – 10 000 K (According to choice)
Color rendering index	80
Electrical features	
Input voltage	220 – 240 V
Input Frequency	50 Hz
Power Consumption	9 W
Power factor	≥ 0.5
Temperature	
Operating Temperature	-20 to +40 °C
Standards	
Energy class	A+
Package data	
Package Dimensions	126 x 32 x 126 mm
Pieces per carton	40

Surface mounted round led panel 9 W

Dimensional Drawing

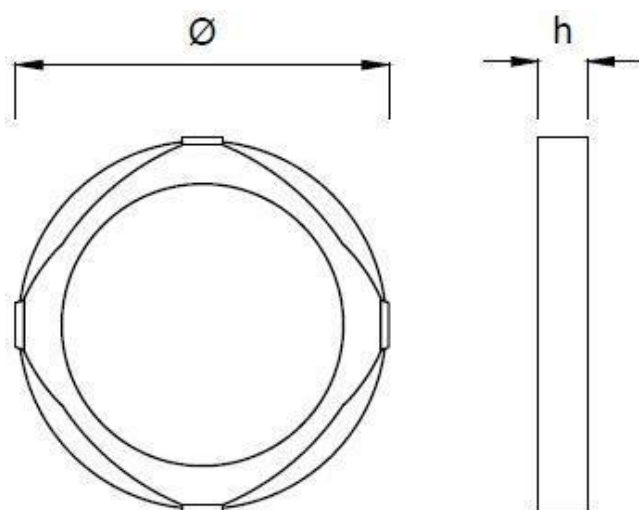


Energy efficiency label

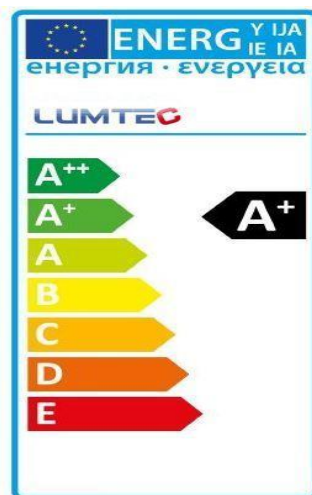




Product	Φ	h
Surface mounted round led panel 9 W	120 mm	28 mm

Photometric

Spectrum

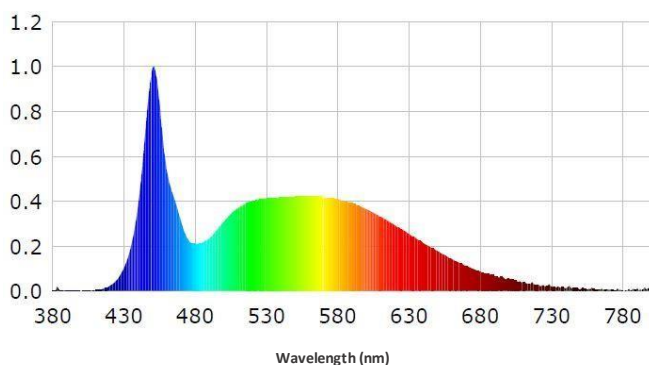

Lifespan

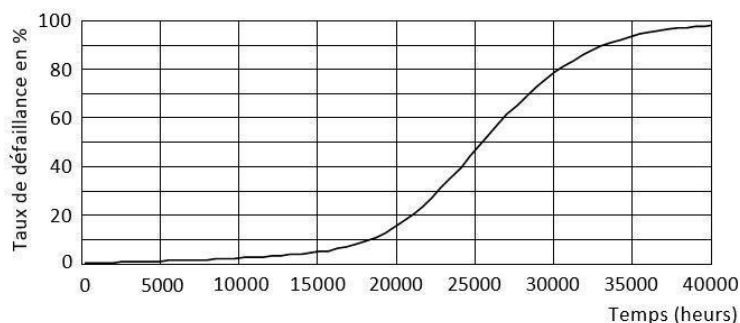

Id: 9105023295



LUMTEC[®]
LIGHT IS LED



www.lumtec.tn



Contact@lumtec.tn